



SHIMPO

Changing the Speed of Industry


RXC

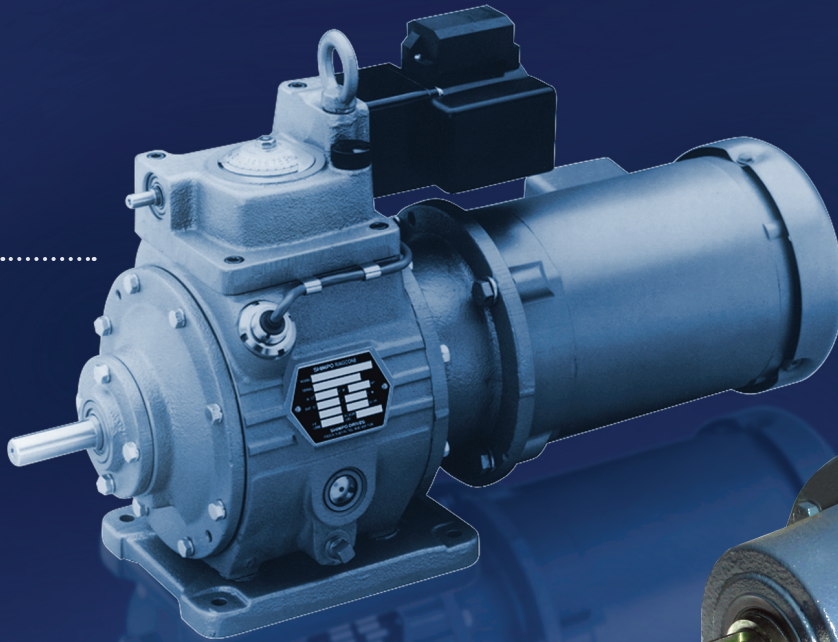

CIRCULUTE 3000®

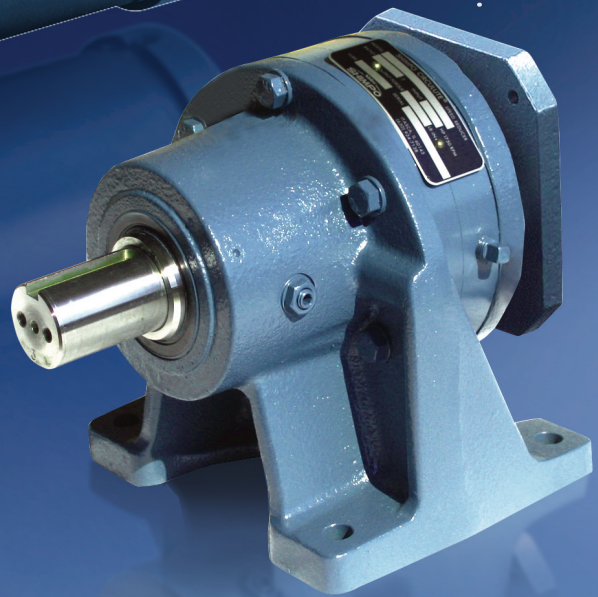

ABLE

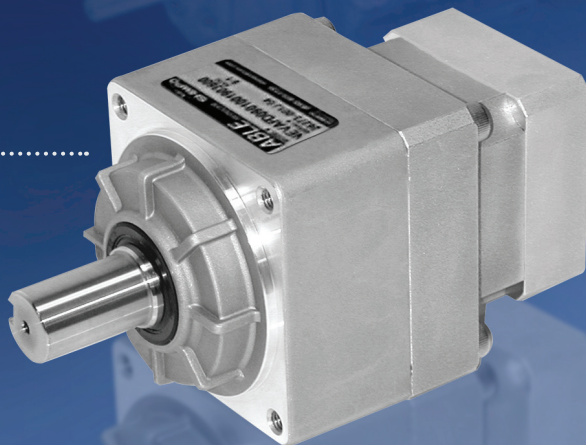


*The path to greater
productivity begins here...*

Nidec
SHIMPO

SHIMPO DRIVES, INC. • Itasca, IL 60143 USA • P: (800) 842-1479 • P: (630) 924-7138 • F: (630) 924-7382
www.shimpodrives.com • info@shimpodrives.com


ABLE - Planetary Speed Reducers for Servo Motors

- Helical planetary gearing – smooth and quiet
- Nominal output torque ratings from 35 to 960 in-lbs
- Motor power ranging from 50W to 5kW
- Multiple backlash ratings, as low as 3 arc-min
- IP65 washdown rating available at no extra charge
- Motor adaptors to fit NEMA, EuroMetric, and AsiaMetric
- Fast shipment from inventory in Chicago
- Very affordable

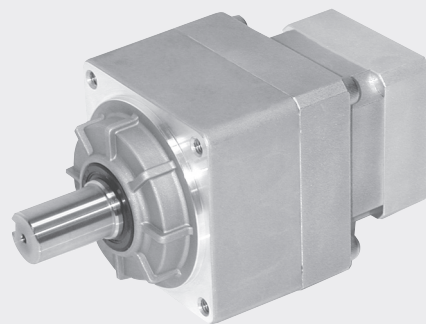

CIRCULUTE 3000 - Cycloidal Reducers for Industry

- Cycloidal construction results in extreme shock load capability
- No need to greatly oversize for tough applications
- Available in low backlash servo configuration (less than 6 arc-min)
- Nominal output torque ratings from 380 to 65,100 in-lbs
- Motor power ranging from 0.1HP to 60HP in AC motor configuration
- Motor power ranging from 100W to 44kW in servo configuration
- IP64 washdown rating available
- Motor adaptors to fit NEMA, EuroMetric, AsiaMetric
- Fast shipment from inventory in Chicago

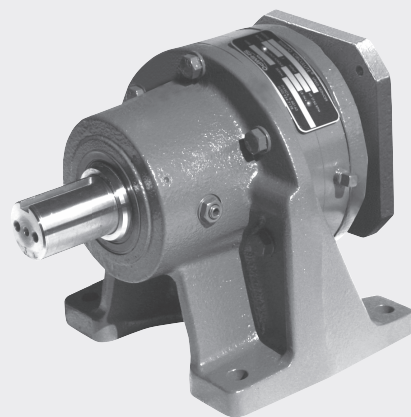

RXC - Ringcone Adjustable Speed Drives

- Ringcone style, oil filled, adjustable speed operation
- 0-800 rpm standard output speed, lower with addition of speed reducer
- Torque increases at lower speed for incredible breakaway torque values
- Excellent for progressive cavity pumps, extruders, heavy conveyors
- Can be used in XP applications
- Available with handwheel and several remote speed changing methods
- Nominal output torque ratings from 15 to 130,000 in-lbs.
- Motor power ranging from ¼ HP to 25 HP
- IP64 washdown rating available
- Motor adaptors to fit NEMA 56C through 326TC
- Fast shipment from inventory in Chicago

